

## S-Video and Audio over Cat5 Extender SVIDUTPEXTA

### Introduction

Thank you for purchasing a StarTech.com S-Video and Audio over Cat5 Extender. This product offers a cost effective way to connect S-Video devices and RCA component audio using Cat5 cable.

### Features

- Extend S-Video signals up to 200 meters
- No software or power adapter required
- Works with Shielded Twisted Pair (STP) and Untwisted Pair (UTP cable)

### Before You Begin


#### System Requirements

- An S-Video video Source
- An RCA component audio source
- Input and Output S-Video cables
- Input and Output RCA component audio cables
- A display with an available S-Video input

#### Contents

- 2 x S-Video Extenders (local and remote ends)
- 1 x 20cm S-Video cable
- 1 x Installation/Mounting Kit
- 1 x User Manual

### Basic Setup

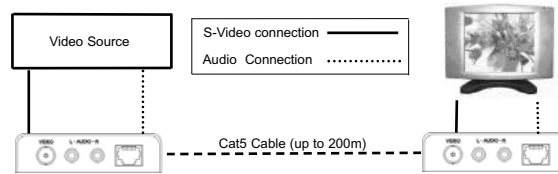


1. Connect the S-Video cable to the output on the back of the audio/video source.
2. Connect the opposite end of the S-Video cable used in **Step 1** to the SVIDUTPEXT local unit (marked **VIDEO**).
3. Connect an audio RCA component cable to the output ports located on the audio/video source.
4. Connect the opposite end of the component audio cable to the audio ports on the local SVIDUTPEXT unit (marked as **L - Audio - R**).
5. Connect the Cat5 cable to the RJ45 port on the local SVIDUTPEXT unit.
6. Connect the opposite end of the Cat5 cable to the RJ45 port on the remote SVIDUTPEXT unit.
7. Connect a second S-Video cable to the designated port on the remote SVIDUTPEXT unit (marked **VIDEO**).
8. Connect the remaining end of the second S-Video cable to the monitor/display. For further instructions on how to locate the S-Video port, please refer to the documentation that accompanied the display at the time of purchase.
9. Connect an audio RCA component cable to the audio ports located on the remote SVIDUTPEXT unit.
10. Connect the opposite end of the component audio cable to the audio output ports located on the audio output device (i.e. Stereo receiver, television etc.)

### Specifications

#### General specifications

<b>Certifications (Regulatory etc.)</b>	FCC, CE, WEEE, RoHS
<b>Connectors</b>	<b>Input:</b> 1 x RJ45 1 x Stereo Audio RCA 1 x S-Video female <b>Output:</b> 1 x RJ45 1 x Stereo Audio RCA 1 x S-Video female
<b>Dimensions (LxWxH)</b>	110 x 77 x 24mm
<b>Weight</b>	460g
<b>Maximum Resolution</b>	480i/480p
<b>Bandwidth</b>	DC to 8MHz

#### Pinout definition:



Pin	Color	Function
1	W-O	S-Video
2	O	S-Video
3	W-G	S-Video
4	BL	Audio R
5	W-BL	Audio R
6	G	S-Video
7	W-BR	Audio L
8	BR	Audio L

### Accessories

#### ZENSVID1

Cable ZEN 3.3 ft (1m) S-Video Cable

#### ZENSVID2

Cable ZEN 6.6 ft (2m) S-Video Cable

#### ZENSVID3

Cable ZEN 9.8 ft (3m) S-Video Cable

#### ZENSVID4

Cable ZEN 13.1 ft (4m) S-Video Cable

#### Support, Warranty Information, and Regulatory Compliance Statement

If you ever need help with your product, visit [www.startech.com/support](http://www.startech.com/support) and access our comprehensive selection of online tools, documentation, and downloads. This product is backed by a one-year warranty. In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear. Limitation of Liability: In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you. FCC Compliance Statement: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.