

USR4503

10/100/1000 COPPER AGGREGATION TAP

ETHERNET TAPS


WITH 1 NETWORK CONNECTION AND 2 UNI-DIRECTIONAL MONITOR CONNECTIONS

The USRobotics 10/100/1000 Copper Aggregation Tap eliminates SPAN port contention, oversubscription, and configuration errors with full duplex monitoring, simple installation, and reliable access to your Gigabit Ethernet segments. This tap faultlessly combines and processes both the TX and RX streams of data into a single data stream allowing any connected monitoring device (analyzer, IDS, probe) to receive a full-duplex stream of data with only one NIC. Improve visibility with two monitor ports sending identical copies to separate network tools for simultaneous monitoring and analyzing. For dual-receive tools, a half-duplex option is available for individual TX and RX streams. Ideal for security applications or anywhere you need non-intrusive dedicated access to your network links for advanced or consolidated monitoring.

USRobotics®

A Division of UNICOM® Global

Full Duplex Gigabit Access for Single Interface Monitoring

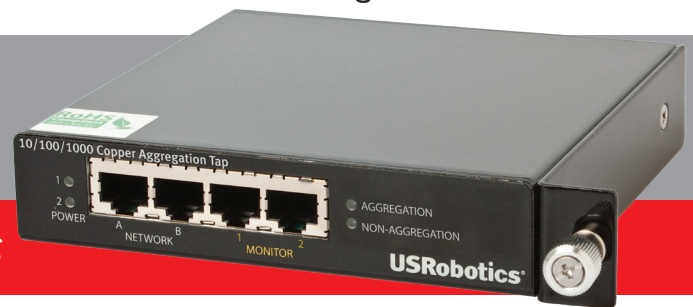

Monitoring & Analysis

- Full duplex monitoring, even with single interface monitoring tools
- Half duplex monitoring allows two monitoring ports to see full line rate traffic
- Regeneration to multiple tools provides access to the same links for system redundancy, testing and advanced monitoring applications
- Improved visibility into the network - including VLAN tags
- Ideal for Intrusion Detection System (IDS) applications

Aggregating Data

- Monitor all network traffic from two different sources
- Improve network troubleshooting by viewing both sides of a full duplex conversation
- Combine both directions of a full duplex data stream in a single trace file
- Allows flexibility of monitoring devices, including the option to revert to traditional full duplex dual channel data capture, utilizing single NIC probes for advanced monitoring or hardware reduction

Network Stability

- Fault-tolerant
- Ideal for 24x7 permanent access - Deploy tools or utilize tap ports immediately without network traffic interruptions or the need for maintenance windows
- Eliminate SPAN port contention, oversubscription, and configuration errors
- Improve overall switch performance by removing port mirror degradation while freeing valuable ports

Security


- Unidirectional and invisible to other devices on the network making it impossible to access or infiltrate connected monitoring and analysis tools

Simple installation


- Plug and play means simple and fast deployments
- Auto negotiates settings for 10/100/1000 Mbps network speeds
- Single network break for permanent installation
- Comes with convenient attached rack mount bracket for use with the optional 1U rack mount kit for up to 3 devices.

Reliability

- Redundant power supply option ensures seamless monitoring even if the main power source is unavailable*
- Inline design allows network connectivity in the event of a power failure



Inline Tap Solution - Aggregated

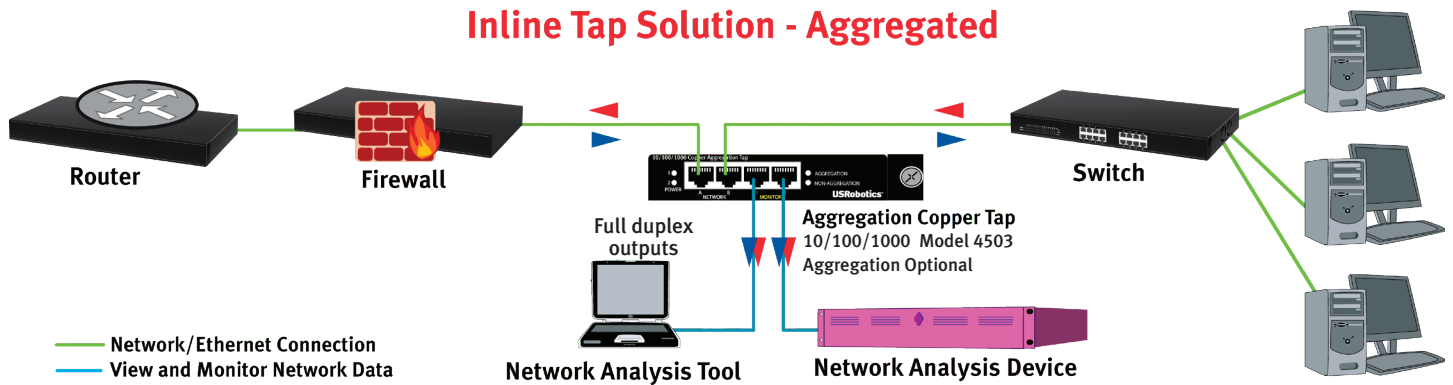

MODEL 4503 10/100/1000 COPPER AGGREGATION TAP



SPECIFICATIONS & STANDARDS

PHYSICAL

- Metal 1U chassis
- Four LEDs (Power 1, Power 2, Aggregation, Non-Aggregation)
- Two RJ-45 10/100/1000 Ethernet Network Ports
- Two RJ-45 10/100/1000 Ethernet Uni-directional Monitor Ports
- Two Power inputs - 5.5 x 2.1mm Barrel Sockets

POWER

- AC Power Supply Input: 100-240VAC, 50-60HZ, 0.8A
- AC Power Supply Output: 5V DC, 1A 5W min
- AC Power Plug Dimension: 2.1mmID x 5.5mmOD, Center Positive

ENVIRONMENTAL

- Temperature:
 - Operating Temperature: 0° to 40° C
 - Non-Operating Temperature: -30° to 65° C
- Humidity:
 - 5% to 90% non-condensing

REGULATORY & CERTIFICATIONS

- FCC approved (Part 15/Class B)
- CE approved
- CAN ICES-3 (A)/NMB-3(A)
- RoHS Compliant
- WEEE Compliant

PACKAGE DIMENSIONS/WEIGHT

- 13.5 x 10.5 x 2.75 in (34.29 x 26.67 x 6.98 cm)
- 3.00 lbs. (1.36 kg)

PRODUCT DIMENSIONS/WEIGHT

- 5.75 x 5.75 x 1.10 in. (14.6 x 14.6 x 2.8 cm) with rack mount
- .75 lbs (.34 kg)

PACKAGE CONTENTS

- USRobotics 10/100/1000 Copper Aggregation Tap with rackmount bracket
- 1 AC Power Supply with power cords for US, UK/IRE, Europe

PRODUCT NUMBERS

- USR4503
- Optional 3 Unit 1U Tap Rack Mount Chassis USR4500-RMK

WARRANTY

- 2-year limited manufacturer warranty from date of purchase



USR4500-RMK - 1U Rack Mount Chassis holding up to 3 Taps

* To eliminate power as a single point of failure two power supplies must be used. The second power supply must be connected to a different external power source circuit than the first power supply. Additional power supplies may be sourced using the specifications provided.

USRobotics®

A Division of UNICOM® Global

www.usr.com

Copyright © 2015 U.S. Robotics Corporation, a Division of UNICOM Global. All rights reserved. U.S. Robotics and USRobotics are registered trademarks of U.S. Robotics Corporation. Other brand names and product names are for identification purposes only and may be trademarks or registered trademarks of their respective companies.

