

# master view™

## 2/4 Port Dual-View KVM Switch


Supports **2** Separate Displays Simultaneously!



### Rear View



### Diagram

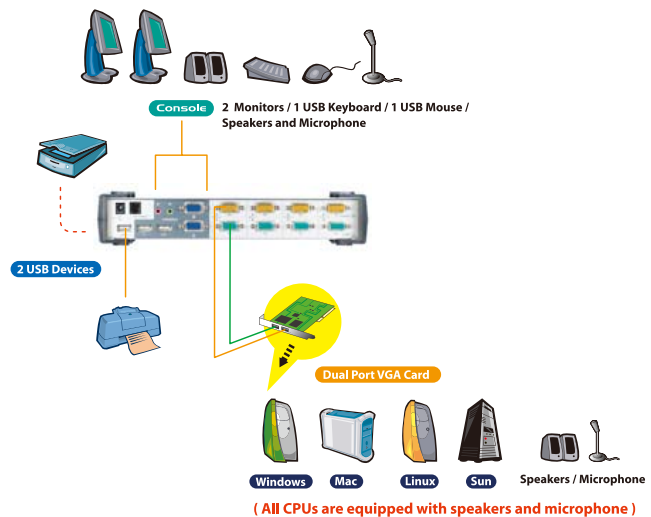

Model: CS-1742/1744

### Features

- Keyboard, Video and Mouse (KVM) console control for up to 2 or 4 dual display computers
- Bi-directional switching and flexible interoperability; switch permits independent PC, peripheral and audio functionality.
- Multi-platform compatibility: PC (Windows/Linux), Mac & Sun
- Supports multimedia USB keyboards
- Multi-button mouse support via drivers
- Supports up to 2048 x 1536 video resolution for optimal display quality
- Flash upgradeable for future firmware updates

### Specifications:

		CS-1742	CS-1744
Company		CS-1742	CS-1744
Console Connection		1	1
PC Selection		Button, Hotkeys	Button, Hotkeys
PC Connection		Direct	2
Connectors	Computer Side	2 x SPHD-15 F (Green)	4 x SPHD-15 F (Green)
		2 x SPHD-15 M (Yellow)	4 x SPHD-15 M (Yellow)
	Console Side	4 x Type-A F (White)	4 x Type-A F (White)
		2 x HDB-15 F (Blue)	2 x HDB-15 F (Blue)
		1 x Audio Jack F (Green)	1 x Audio Jack F (Green)
Power Port (Spare)	1 x Audio Jack F (Pink)	1 x Audio Jack F (Pink)	
	1 x RJ-11 F (Black)	1 x RJ-11 F (Black)	
LEDs	On Line / Select	1 x DC Jack F (Black)	1 x DC Jack F (Black)
	USB	2 x Orange @ Front	4 x Orange @ Front
Button	Select	2 x Green @ Front	4 x Green @ Front
		2 x Bullet, Transparent @ Front	4 x Bullet, Transparent @ Front
Power Consumption		DC 5V, 1.25W	DC 5V, 1.35W
Keyboard / Mouse Emulation		USB	USB
Scan Interval		1 ~ 99 seconds	1 ~ 99 seconds
Resolution		2048 x 1536, DDC2B	2048 x 1536, DDC2B
Operation Temperature		0 ~ 50°C	0 ~ 50°C
Storage Temperature		-20 ~ 60°C	-20 ~ 60°C
Humidity		0 ~ 80% RH, NC	0 ~ 80% RH, NC
Enclosure		Metal	Metal
Weight		820 g	1030 g
Dimension		200 x 74.5 x 42 mm	260 x 74.5 x 42 mm