


# AXIS T8061 Ethernet Surge Protector

## Protect PoE device from lightning

Protect your Ethernet network devices, such as IP cameras, switches or midspans, from lightning entering through the Ethernet cable with AXIS T8061 Ethernet Surge Protector. It can be easily installed on a wall or a pole, and thanks to its weatherproof enclosure, it can withstand water, dust and the ingress of water. AXIS T8061 Ethernet Surge Protector can be installed before the Ethernet cable enters the building to protect indoor network devices, or immediately adjacent to outdoor Axis network cameras.

- > Supports data rates of up to 1 Gbps
- > Protects up to 10 kV surge
- > All eight lines protected, including PoE
- > Outdoor ready
- > Flexible installation wall or pole mounted

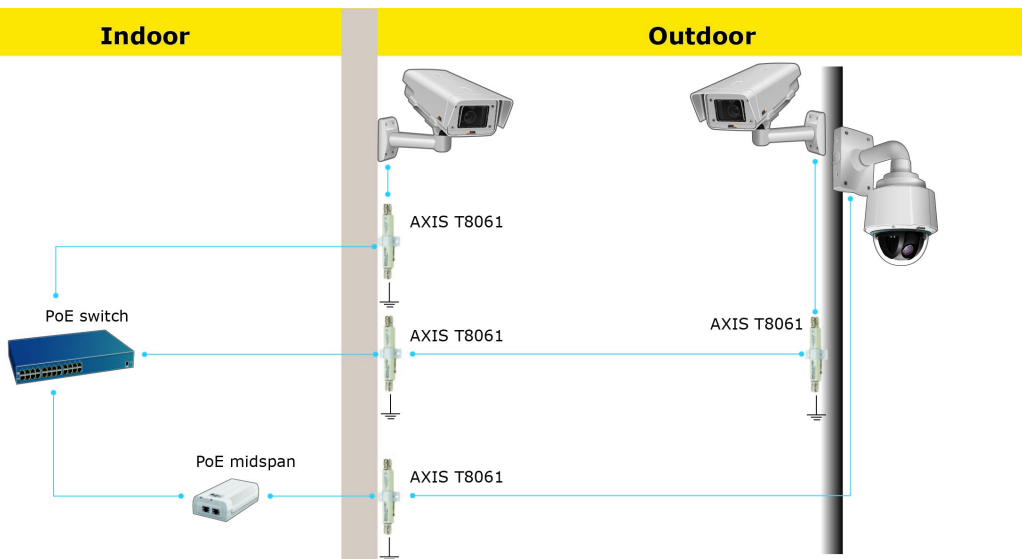

# AXIS T8061 Ethernet Surge Protector

General	
<b>Casing</b>	Weatherproof metal enclosure
<b>Dimensions</b>	30 x 30 x 190 mm 1.18 x 1.18 x 7.48 in
<b>Weight</b>	270 g 0.6 lb
<b>Environment</b>	Indoor Outdoor
<b>Mounting option</b>	Wall Pole (requires straps or similar)
<b>Connectors</b>	RJ45 10BASE-T/100BASE-TX/1000BASE-T PoE
<b>Power</b>	Surge Handling Capability: 10 kV, 5 kA to ground in 8/20 $\mu$ s 800 V, 100 A PoE Input Power: 95 W (max) Input Current: 2 A (max)
<b>Operating conditions</b>	-40 °C to 85 °C -40 °F to 185 °F
	0 to 95% (non-condensing)
<b>Approvals</b>	IEC 60529 IP66 NEMA 250 Type 4X IEC 61643-21 UL 497B GR1089 ITU-T K.45 EN 50581 REACH WEEE
<b>Optional accessories</b>	For more accessories, see <a href="http://www.axis.com">www.axis.com</a>
<b>Warranty</b>	Axis 3-year warranty, see <a href="http://www.axis.com/warranty">www.axis.com/warranty</a>

Environmental responsibility:  
[www.axis.com/environmental-responsibility](http://www.axis.com/environmental-responsibility)