



High Speed HDMI Cable

Mini HDMI Male to HDMI Male, Shielded, Black

High-speed cables deliver high-definition performance.

HDMI has become the standard digital connection, delivering the highest-quality audio and video signal over a single cable. MANHATTAN® High Speed HDMI cables are designed and carefully constructed to meet the evolving needs of the high-definition marketplace. MANHATTAN High Speed HDMI shielded cables provide the highest resolution possible at 4K x 2K, an audio return channel and a bandwidth of 10.2 Gigabits per second at 340 MHz. These high-quality cables provide high-definition video and multi-channel, digital audio with increased performance characteristics, greater accuracy and expanded features. No matter if you need device cables, extension cables, or mini or micro connections, MANHATTAN has your High Speed HDMI Cables covered.


Model	Length
308809	1.0 m (3.3 ft.)
304955	1.8 m (6 ft.)
304962	3.0 m (10 ft.)
304993	5.0 m (16.5 ft.)

Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.

Model
308809
304955
304962
304993



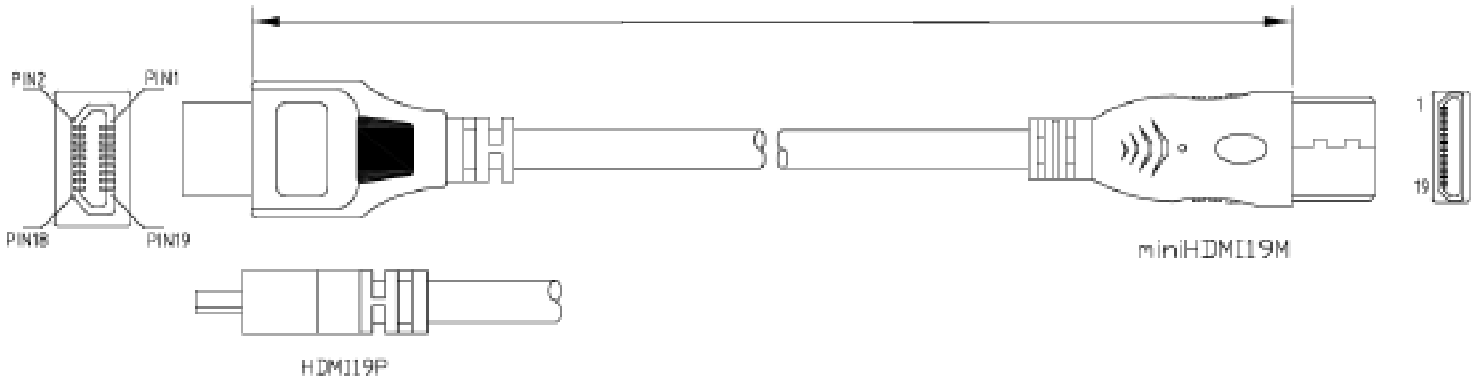

NOTE:

1. CABLE: (1P*28#+AL+D+MYLAR)*4C+(1P+5C)*28#+AL+B/UL20276
BLACK COLOR,OD=6.5mm,PVC JACKET
2. LENGTH: 5000mm
3. CONNECTORS: miniHDMI19M*1,HDMI19P*1
4. MOLD: HDMI MOLDING.
6. CONTACTS:

MINI19P	3	1	2	6	4	5	9	7	8	12	10	11	13	14	15	16	17	18	19	64
HDMI19P	3	1	2	6	4	5	9	7	8	12	10	11	13	14	15	16	17	18	19	64

7. OPEN/SHORT TEST:100% TEST.
INSULATION: MIN. 2M.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE.



APPO:	REVO:
CUSTOMER:	DRD: XIE
SCALE: /	LIMIT: (BUB)
FILE:	SIZE: A4
BARCODE NO.:	FILE NAME:
SHEET: 1 / 1	REV: A

Features

- Mini HDMI 19-pin male to HDMI 19-pin male gold-plated connections
- Ensures the integrity of the signal between HDMI devices
- Supports HD resolutions beyond 1080p and Deep Color
- Compliant with High Speed HDMI specifications
- Up to 10.2 Gbps at 340 MHz bandwidth
- Fully shielded to reduce EMI and other interference sources
- Molded PVC boot
- Lifetime Warranty

Specifications

STANDARDS & CERTIFICATIONS

- UL 20276
- ISO9002
- RU
- CE

GENERAL

- Bandwidth: 10.2 Gbps
- 340 MHz
- Meets or exceeds existing HDMI standards
- Length: listed on Page 1

CONTACTS

- 1 x HDMI 19-pin male
- 1 x Mini HDMI 19-pin male

- Gold plated
- Molded PVC boot
- Shielded, aluminum and braided
- 28 AWG connectors

ELECTRICAL

- Current rating: 0.5 A DC
- Withstanding voltage: 300 V DC
- Insulation resistance: 50 MOhms
- Conductive resistance: 2 Ohms
- Thermal plastic casing

PACKAGE CONTENTS

- High Speed Mini HDMI Male to HDMI Male

For more information on MANHATTAN products, consult your local dealer or visit www.manhattan-products.com.



Copyright © MANHATTAN

