



DisplayPort Monitor Cable

DisplayPort Male / DisplayPort Male, Black

High-definition performance for personal computing.

MANHATTAN® DisplayPort Cables provide a single-cable solution that delivers both high-definition digital audio and video signals between desktop and notebook computers and an output device. With 10.8 Gbps bandwidth (1080 Mbps), DeepColor and 24-bit, 8-channel uncompressed audio capability, the 20-pin connector is small, compact and ideal for use with DisplayPort-equipped computers, flat-panel displays, slim-profile devices and many consumer electronics including Blu-ray players and game consoles. Full foil and braided shielding, molded boots with strain relief, protective PVC jackets and gold-plated connections help MANHATTAN DisplayPort Cables provide maximum conductivity and clear, crisp signal transmissions with reduced EMI interference and distortion.

Model	Length
306935	1 m (3.3 ft.)
307116	2 m (6.6 ft.)
391931	2 m (6.6 ft.)
307093	3 m (10 ft.)


Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.

Model
306935
307093
307116
391931



REV.	DESCRIPTION	ENG.	APPROVAL

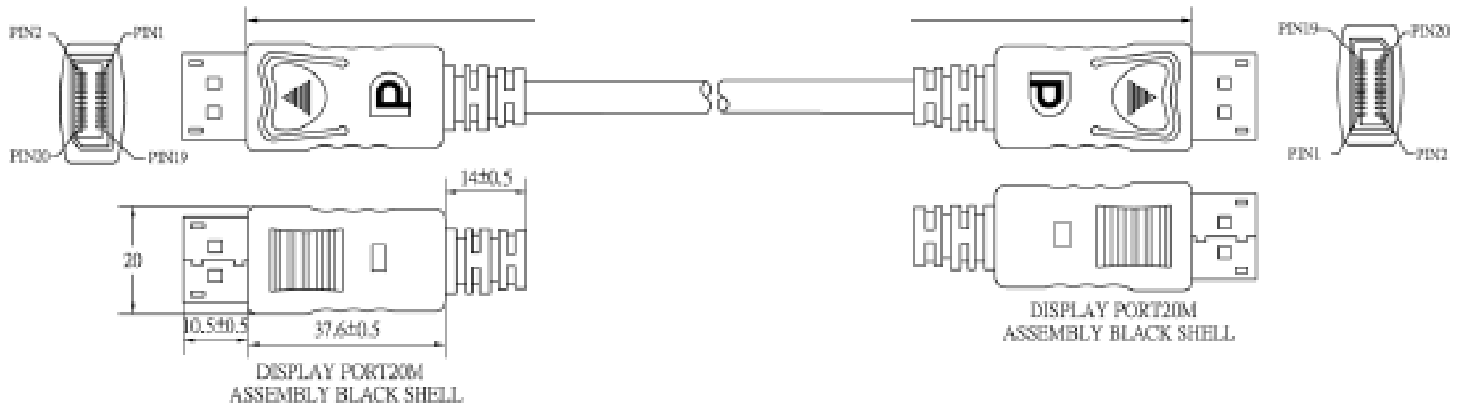

NOTE:

1. CABLE:UL20276,(28#*1P+1+AL)*5Pair+28#*4C+AL+B,OD=6.8mm,BLACK COLOR,PVC JACKET. (AM BRAID)
2. LENGTH:2000mm
3. CONNECTOR:DISPLAY PORT20M *2PCS.
4. MOLD:ASSEMBLY BLACK SHELL
5. CONTACTS:

DISPLAY PORT20M	1	3	2	4	6	5	7	9	8	10	12	11	13	14	15	17	16	18	19	64
DISPLAY PORT20M	12	10	11	9	7	8	6	4	5	3	1	2	13	14	15	17	16	18	19	64
	TP		GND		TP		GND		TP		GND		TP		GND		TP		GND	

6. OPEN/SHORT TEST:100% TEST.
INSULATION: 5M.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE=±°

TOLERANCE (mm)	TOLERANCE (mm)
0 - 40.00°	0 - 40.5mm
0.05 - 40.01°	0.05 - 40.70mm
0.10 - 40.02°	0.10 - 40.90mm
0.15 - 40.03°	0.15 - 41.10mm



TITLE:	APPD:		
	Check:	XIE	
CUSTOMER:	Drawer:	WJE	Date: 08/15/25
CUSTOMER P/N:	Unit:	mm	Projection: 1P
KT P/N:	Scale:	1:1	Size: A4
DWG. NO:	Sheet:	1 of 1	REV: A

Features

- DisplayPort 20-pin male to DisplayPort 20-pin male latching connections
- Delivers high-bandwidth, digital audio/visual signals from PC to display and other DisplayPort-enabled devices – up to 1080p resolution
- Supports HDMI and DVI signal pass-through
- Fully shielded to reduce EMI and other interference sources
- Plug and Play for box-to-box applications
- Molded PVC boot
- Lifetime Warranty

Specifications

STANDARDS AND CERTIFICATIONS

- UL 20276
- DisplayPort v1.1

CONNECTORS

- (2) DisplayPort 20-pin male with latches
- Nickel plated
- Molded PVC boot

CABLE

- 28 AWG connectors
- Shielding: aluminum and Mylar braid
- Withstanding voltage: 300 V DC
- Insulation resistance: 5 MOhms
- Contact resistance: 10 Ohms
- PVC jacket

PACKAGE CONTENTS

- DisplayPort Monitor Cable

For more information on MANHATTAN products, consult your local dealer or visit www.manhattan-products.com.



Copyright © MANHATTAN

